



Customer: Miscellaneous

Ø3.500±0.14in

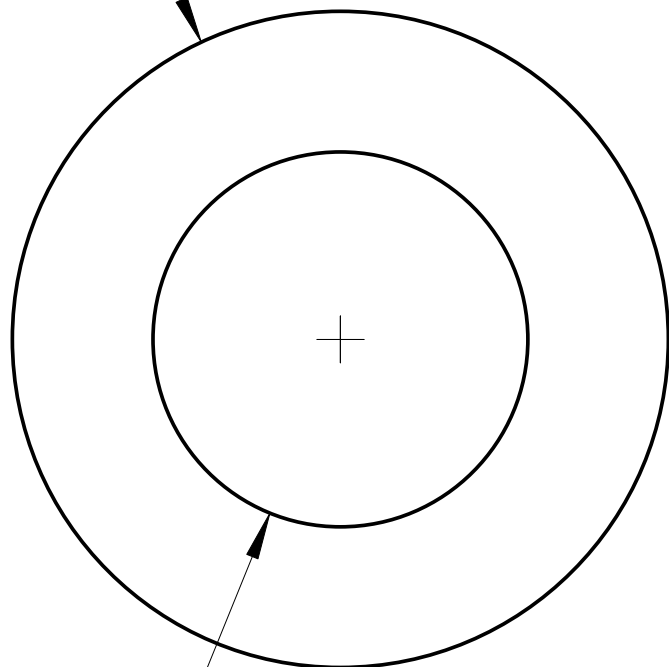

Ø2.000±0.08in

0.500±0.03in

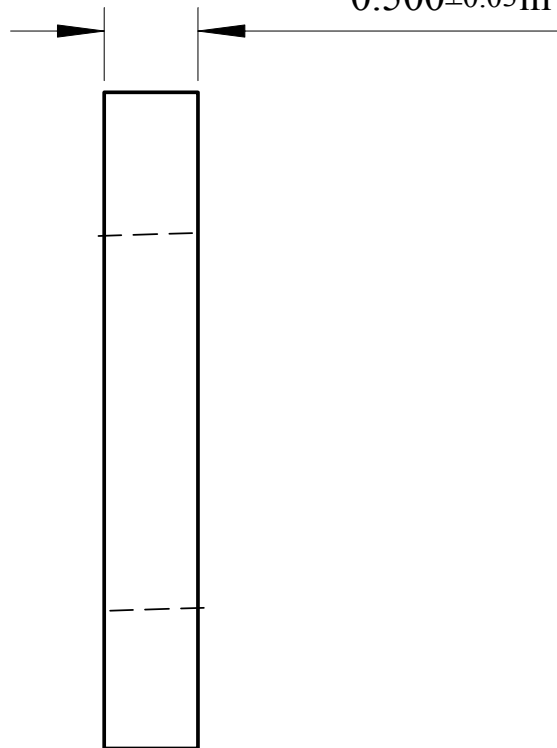

NOTES

- 1 MATERIAL: 'M', Initial Permeability = 125, Rounded edges
- 2 ELECTRICAL TEST: Instrument = HP4342A at 2.5 MHz, Fixture = Wind 10 Turns (3', #25 AWG), 3" above meter,
- 2 ELECTRICAL TEST: Specifications = (L= 17.8 microH +/- 20% (14.2/21.4), Q = 100 min.)

 NATIONAL MAGNETICS GROUP, INC.
 1210 Win Drive
 Bethlehem, PA 18017 - 7061
 Tel: 610 - 867 -7600 Fax: 610 - 867 -0200
 Affiliate TCI Ceramics

Rev.	Description	Approved	Date	DESCRIPTION: FERRITE TOROID
1	Reference part file	RMZ	23Mar2004	FSCM: 94312 P/N: M-995